



# HDRK Installation Instructions


## HDDY, HDRK, HDST INSTALLATION INSTRUCTIONS

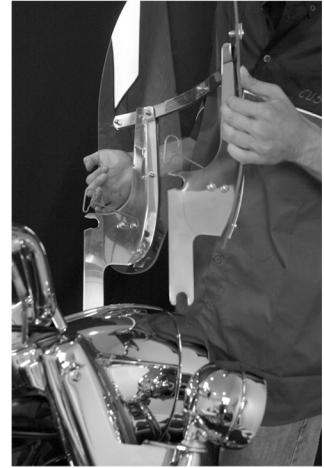

1. Remove existing shield from bike using quick detach mechanism.

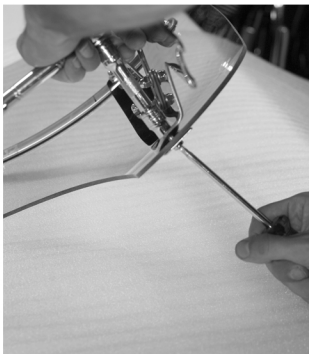


2. Remove vertical hardware from shield using socket wrench, 3/8" socket, and appropriate torx driver.

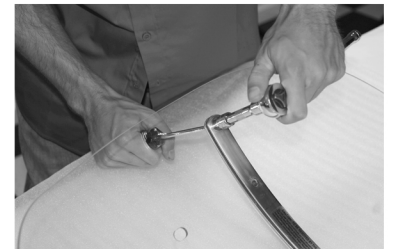

3. With vertical hardware removed, remove two horizontal straps.

### INSTALL WHITE NYLON WASHERS PROVIDED BETWEEN FRONT STRAPS AND SHIELD

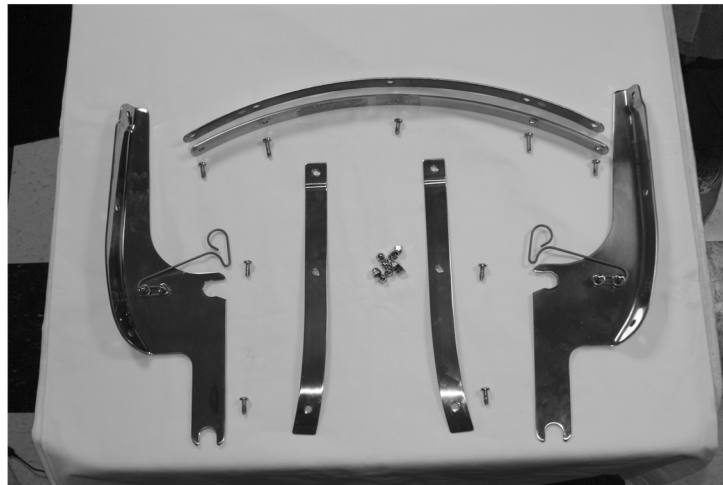

4. Clean hardware as desired.

5. Remove new F4 shield from packaging material. Caution should be used when mounting steel straps to avoid sliding the straps and gouging new shield. Reinstall horizontal straps. With horizontal straps in place, install vertical hardware.

6. Mount new shield with hardware attached on the bike. Ride safe.