


HDRK, HDST, HDDY Installation Instructions



1. Remove existing shield from bike using quick detach mechanism.

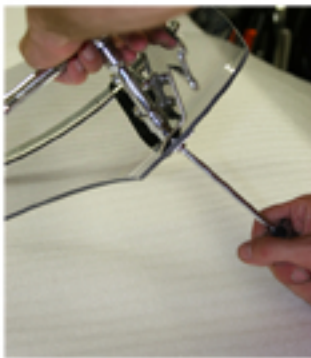


2. Remove vertical hardware from shield using socket wrench, 3/8" socket, and appropriate torx driver.



3. With vertical hardware removed, remove two horizontal straps.

INSTALL WHITE NYLON WASHERS BETWEEN SHIELD AND FRONT HARDWARE

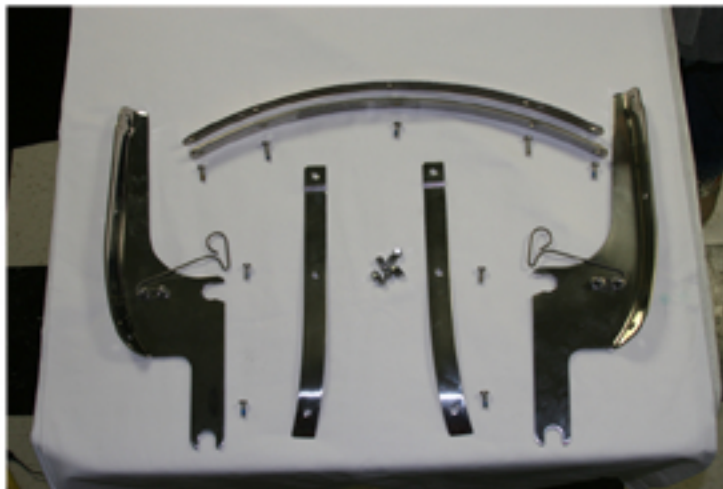

4. Clean hardware as desired.

5. Remove new F4 shield from packaging material. Caution should be used when mounting steel straps to avoid sliding the straps and gouging new shield. Playing card or similar item will protect shield from straps. Reinstall horizontal straps. With horizontal straps in place, install vertical hardware. Nylon washers are installed between front hardware and shield. Use foam tape as needed on rear hardware.

6. Mount new shield with hardware attached on the bike. Ride safe.

TIP: USE PLAYING CARDS TO PROTECT SHIELD FROM SHARP EDGES DURING RE-ASSEMBLY

F4 Customs LLC - 330.968.4644 - sales@f4customs.com - www.f4customs.com